


PRODUCT DATA SHEET
PALLMANN MAGIC OIL CARE
2K GB 0515 01



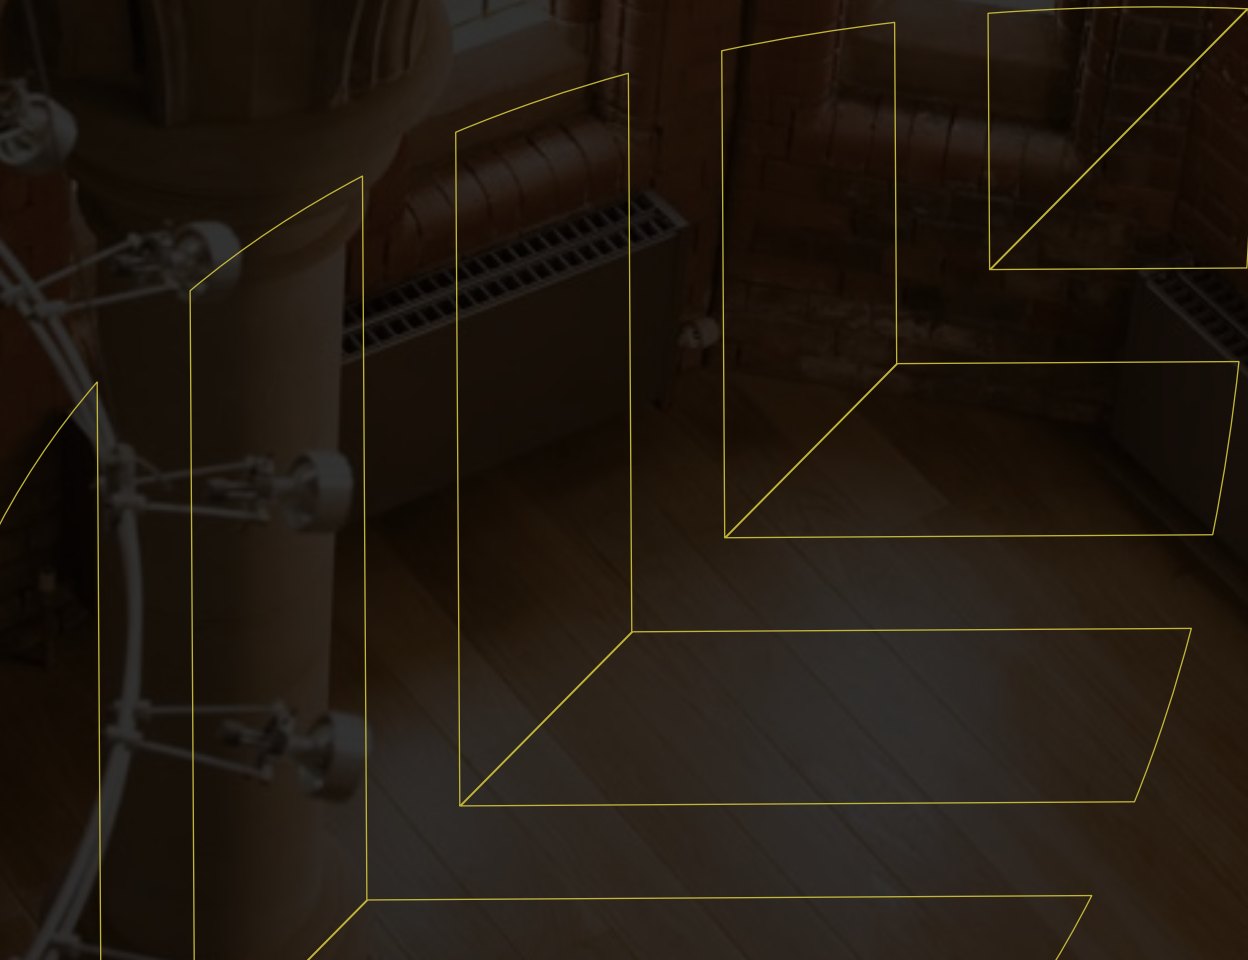

MAGIC OIL CARE

Care product for maintenance-cleaning of wood floorings treated with products of the Magic Oil 2-component Line and Soyabase Plus. Refresher ingredients provide a reoiling effect.

Description:

Care product for maintenance-cleaning of wood floorings treated with products of the MAGIC OIL 2-component Line and SOYABASE PLUS. Refresher ingredients

Care tip:

In order to extend the life span of an impregnated parquet/wood flooring, a professional, thorough, periodic cleaning and specialist re-treatment is essential. The frequency of use for this system is dependant on the use and maintenance of the floor. Please refer to your parquet professional for more detailed advice.

Product Properties / Benefits:

MAGIC OIL CARE has components, which produce a "topping up" effect. This effect renews lasting care and protection. Dependant on dosage during the maintenance programme, the intervals for thorough cleaning and re-treatment are extended.

- easy to apply
- slip-resistant
- antistatic

Technical Data:

Packaging:	plastic canister
Pack size:	0.75 litre and 5 litre
Shelf life:	approx. 24 months, protect against frost.
Colour:	white
Foot traffic:	immediately after drying
Routine care, consumption(1) :	between 500 ml/10 ltrs with water and undiluted

* Under normal conditions at 20 °C.

(1) Consumption can vary according to the absorbency and condition of the surface of the wood or parquet to be impregnated.



PALLMANN

MAGIC OIL CARE

Surface Preparation:

Remove all dust, dirt and grease from the floor using a mop, soft brush or vacuum cleaner.

Application:

1. Before use, bring the containers to room temperature and shake well.
2. Routine care: For ongoing maintenance, dilute approx. 500 ml Pallmann MAGIC OIL CARE with 10 litres of water. For thorough maintenance the Pallmann can be used at higher strength to undiluted. Using a suitable applicator (lint-free), apply one damp (not wet) coat in one direction over the floor surface and allow to dry.
3. Clean tools after use with clean water.
4. Thorough care frequency is dependant on floor useage and maintenance.
5. For long flooring life, we recommend regular cleaning according to the manufacturer's instructions. The exact maintenance routine is shown in the care instructions for the MAGIC OIL 2K range.

Important Notes:

- Shelf life minimum 24 months in original packaging when stored in relatively cool conditions. Tightly re-seal opened packaging and use as quickly as possible. Protect against frost.
- Optimum conditions are 18 – 25 °C, relative humidity < 65 %. Low temperatures and high humidity lengthen, whilst high temperatures and low humidity shorten the drying time.
- Flecks and applicator marks can be removed with undiluted Pallmann CLEAN on a cloth or non-scratch white pad.
- Regular maintenance with Pallmann MAGIC OIL CARE improves the visual appearance and increases the wear-life of the oiled and waxed surfaces.

The following standards and publications are applicable and especially recommended: DIN 18 356 "Working with parquet", DIN 18 367 "Working with wood-blocks" and DIN 18 365 "Working with floor coverings".

Protection of the Workplace and the Environment:

Non-flammable. During application, it is recommended to use barrier cream and to ventilate the work area.

Disposal:

Where possible, collect product residues and re-use. Do not allow into drains, water courses or landfill. Empty, drip-free plastic or metal containers are recyclable [DSD]. Containers with liquid residues, as well as collected, liquid product residues, are Special Waste. Containers with dried residues are Construction Waste.

The above information is based on our experience and careful investigations. The variety of associated materials and different construction and working conditions cannot be individually checked or influenced by us. The quality of your work depends, therefore, on your own professional judgement and product usage. If in doubt, conduct a small test or obtain technical advice. Observe the installation recommendations of the covering manufacturer.

The publication of this Product Data Sheet invalidates all previous product information. The respective updated version of this datasheet can be found on our homepage under www.pallmann.net





RAINLEAF
ARTISAN WOOD FLOORIST

Rainleaf Limited

Unit 21, Peartree Business Centre,
Colchester, Essex CO3 0JN
United Kingdom

Tel. +44 01206 547177
info@rainleaf.com

www.rainleaf.com

